


## Heritage Log Slab Siding - Specification Sheet

Heritage Log Slab Siding is a carefully hand crafted product produced from Douglas Fir, Lodge Pole Pine, Spruce, Hemlock and Inland Red Cedar. Each Log is carefully selected for soundness and beauty. The logs are then sawed to the customers desired thickness and placed on stickers to air dry ( AD) or Kiln Dried. Each board is then graded and selected for appearance, trimmed for defect. Each board is kept in the longest possible length, custom long lengths are available upon request. Finished siding is supplied with a back relief to help stabilize the wood and minimize movement. All siding can be supplied Pre-Stained to the Jobsite. Lead time varies form 4-6 weeks or less, 90 day advance order is recommended. Please contact Heritage Lumber for recommended installation instructions.




### Heritage Log Slab Siding Rough Sawn or Circle Sawn Face - Specification

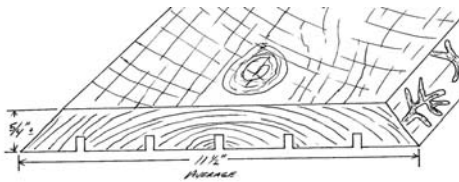

Heritage Log Slab Siding , Available in 4/4" through 8/4" Standard or thicker siding if required, Average Width 10-11" , KD or AD , Rough Sawn Face, RW, RL with Back Relief

### Heritage Log Slab Siding Ads Face - Specification

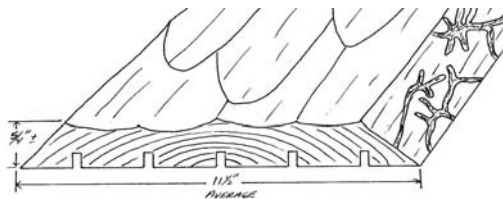

Heritage Log Slab Siding , Available in 4/4" through 8/4" Standard or thicker siding if required, Average Width 10-11" , KD or AD , Ads Face, RW, RL with Back Relief